

Air Impact Wrench Series

1" for specialized in toughest working areas

Air Impact Wrench Series

1" for specialized in toughest working areas

61048L



1" Air Impact Wrench
8" Extended

Free Speed	3,200 RPM
Clutch	Twin Hammer
Working Torque (5s)	2,800Ft-lbs. (3,794Nm)
Max. Torque (15s)	3,000Ft-lbs. (4,065Nm)
Bolt Capacity	2-3/8" (60mm)
Ave. Air Consumption	8.7CFM (246.4 L/min)
Length	590mm (23.2in.)
Net Weight	14.6kg [32.2lbs.]
Air Inlet	1/2"
Air Pressure	90-115PSI [6.3-8kg/cm ²]


61018L



1" Air Impact Wrench
8" Extended

Free Speed	3,800 RPM
Clutch	Twin Hammer
Working Torque (5s)	2,200Ft-lbs. (2,985Nm)
Max. Torque (15s)	2,500Ft-lbs. (3,389Nm)
Bolt Capacity	1-15/16" (50mm)
Ave. Air Consumption	8.5CFM (240.7L/min)
Length	580mm (22.8in.)
Net Weight	15kg [33.3lbs.]
Air Inlet	1/2"
Air Pressure	90PSI [6.3kg/cm ²]

61078L

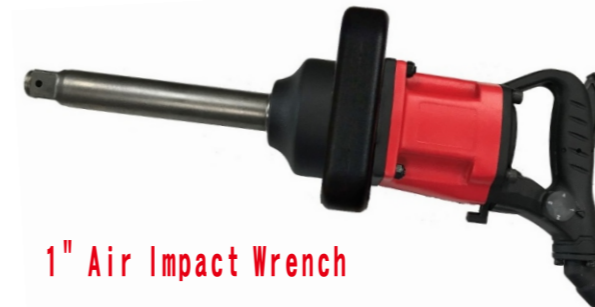

1" Air Impact Wrench

Free Speed	5,000 RPM
Clutch	Twin Hammer
Working Torque (5s)	2,200Ft-lbs. (2,985Nm)
Max. Torque (15s)	2,500Ft-lbs. (3,389Nm)
Bolt Capacity	1-15/16" (50mm)
Ave. Air Consumption	8.5CFM (240.7 L/min)
Length	545mm (21.5in.)
Net Weight	10kg [22.1lbs.]
Air Inlet	1/2"
Air Pressure	90PSI [6.3kg/cm ²]


6111



1" Air Impact Wrench

Free Speed	5,000 RPM
Clutch	Twin Hammer
Working Torque (5s)	2,200Ft-lbs. (2,985Nm)
Max. Torque (15s)	2,500Ft-lbs. (3,389Nm)
Bolt Capacity	1-1/2" (38mm)
Ave. Air Consumption	7.8CFM (220.9 L/min)
Length	339mm (13.4in.)
Net Weight	6.5kg [14.3lbs.]
Air Inlet	3/8"
Air Pressure	90PSI [6.3kg/cm ²]


61026L

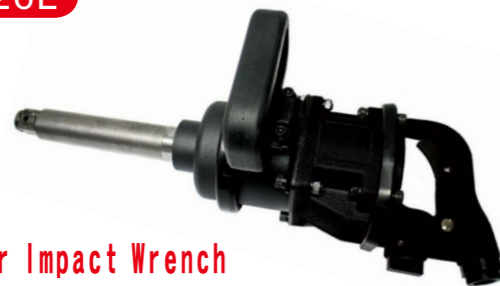

1" Air Impact Wrench
6" Extended

Free Speed	4,000 RPM
Clutch	Twin Hammer
Working Torque (5s)	2,000Ft-lbs. (2,714Nm)
Max. Torque (15s)	2,200Ft-lbs. (2,985Nm)
Bolt Capacity	1-3/4" (45mm)
Ave. Air Consumption	6.8CFM (192.6 L/min)
Length	488mm (19.3in.)
Net Weight	11kg [24.4lbs.]
Air Inlet	1/2"
Air Pressure	90PSI [6.3kg/cm ²]


6103



1" Air Impact Wrench

Free Speed	3,500 RPM
Clutch	Twin Hammer
Working Torque (5s)	1,800Ft-lbs. (2,439Nm)
Max. Torque (15s)	2,000Ft-lbs. (2,714Nm)
Bolt Capacity	1-5/8" (41mm)
Ave. Air Consumption	6.5CFM (184.1 L/min)
Length	296mm (11.7in.)
Net Weight	10.2kg [22.7lbs.]
Air Inlet	1/2"
Air Pressure	90PSI [6.3kg/cm ²]


61116L

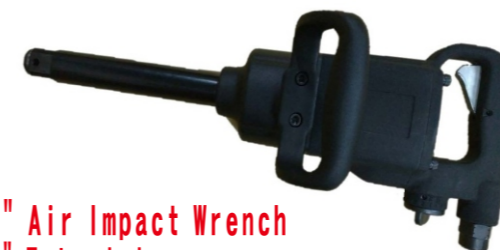

1" Air Impact Wrench
6" Extended

Free Speed	5,000 RPM
Clutch	Twin Hammer
Working Torque (5s)	2,200Ft-lbs. (2,985Nm)
Max. Torque (15s)	2,500Ft-lbs. (3,389Nm)
Bolt Capacity	1-1/2" (38mm)
Ave. Air Consumption	7.8CFM (220.9 L/min)
Length	491mm (19.4in.)
Net Weight	7.4kg [16.3lbs.]
Air Inlet	3/8"
Air Pressure	90PSI [6.3kg/cm ²]

61118L

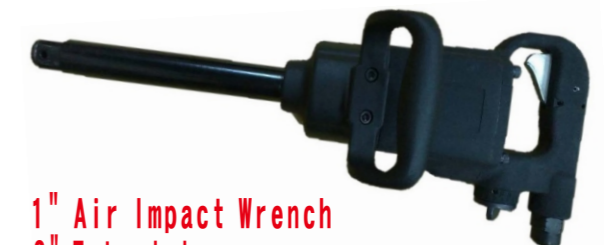

1" Air Impact Wrench
8" Extended

Free Speed	5,000 RPM
Clutch	Twin Hammer
Working Torque (5s)	2,200Ft-lbs. (2,985Nm)
Max. Torque (15s)	2,500Ft-lbs. (3,389Nm)
Bolt Capacity	1-1/2" (38mm)
Ave. Air Consumption	7.8CFM (220.9 L/min)
Length	542mm (21.4in.)
Net Weight	7.7kg [17.0lbs.]
Air Inlet	3/8"
Air Pressure	90PSI [6.3kg/cm ²]